


**TM**

**TM**

# TM

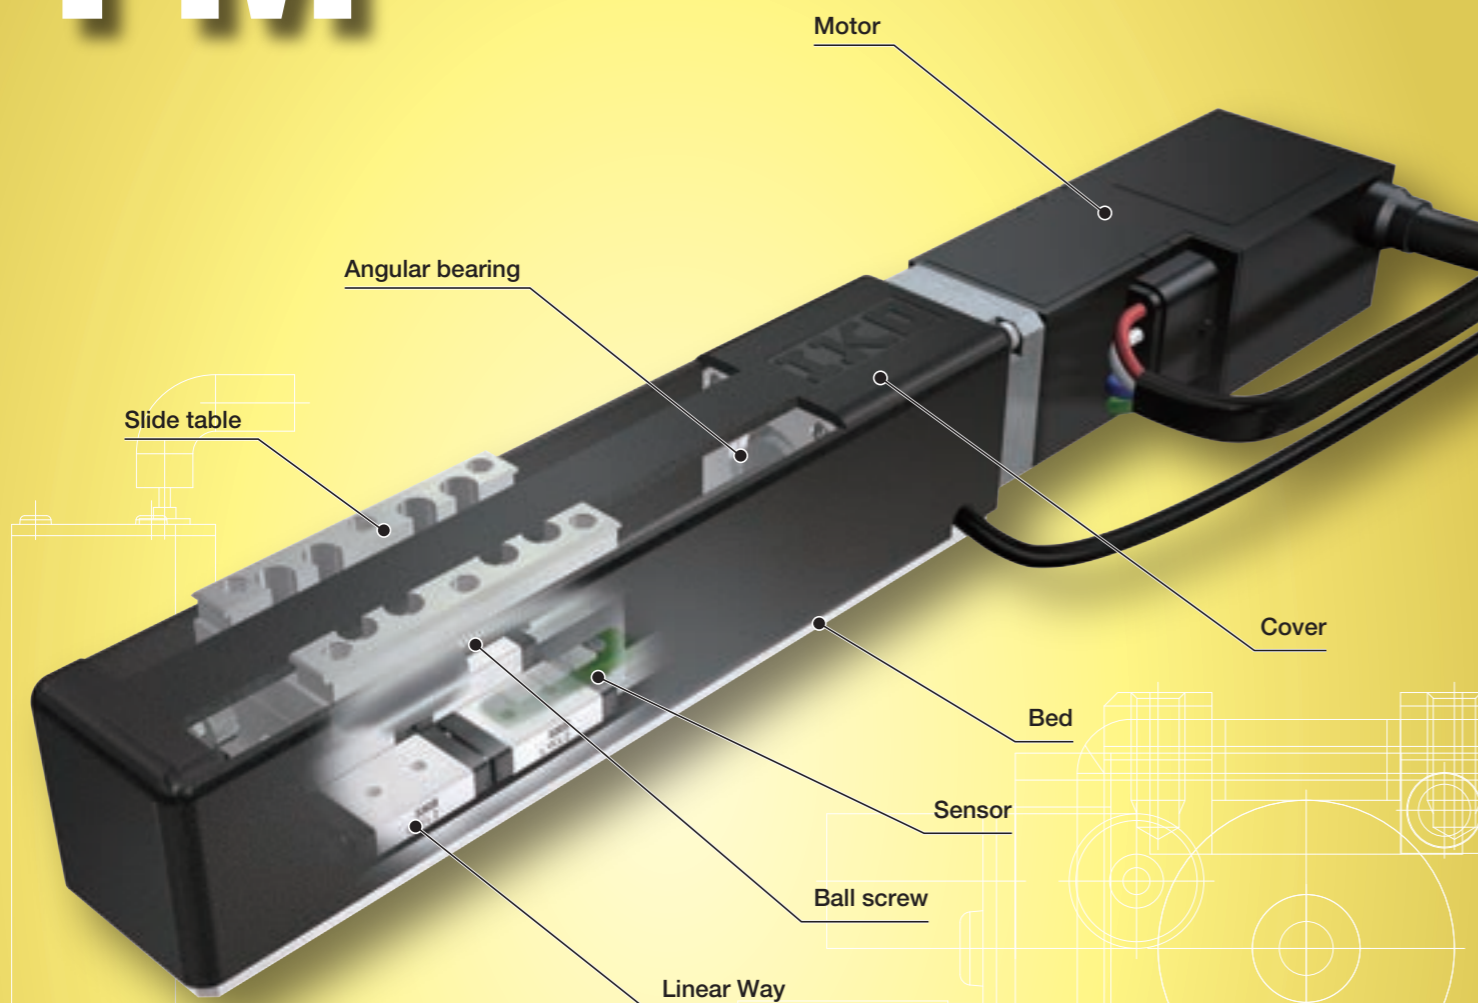

## Major product specifications

Driving method	Precision ball screw
Linear motion rolling guide	Linear Way (ball type)
Built-in lubrication part	No built-in
Material of table and bed	Stainless steel
Sensor	Select by identification number

## Accuracy

unit: mm

Positioning repeatability	±0.001~0.002
Positioning accuracy	0.015
Lost motion	-
Parallelism in table motion A	-
Parallelism in table motion B	-
Attitude accuracy	-
Straightness	-
Backlash	-

# Points

● **Ground ball screw drive realizes ultra-small positioning table with sectional height of 20mm and width of 17mm.**

1 Incorporating a Micro Linear Way L of 2mm in rail width in the table guiding parts and a miniature ball screw of 2mm in diameter in the feeding mechanism, this is an unparalleled ultra-small size positioning table with ground ball screw drive type.

● **Table specification is selectable according to your use.**

3 There are two types in the shape of slide table: standard table and long table. As two Micro Linear Way L with two slide units are incorporated in parallel into the long table, the table is structurally resistant to moment and complex load. The motor can be selected from two types of AC servomotor (standard type or high torque type) and stepper motor according to your use.

● **Maximum table speed of 150mm/s is exerted.**

2 Combination of high-lead ball screws and high-torque AC servomotors enables the table to move at high speed without reducing the accuracy.

● **Super small sensor can also be optionally built in.**

4 Built-in origin, pre-origin, CW limit and CCW limit sensors can be indicated without modifying the outside dimensions.

✓ **Widely applicable in such fields as below!**


Featuring the ultra-small size yet super precision positioning capability, this table is best suited to enhancing the accuracy of the positioning mechanism of super small device. And, use of stainless steel in steel parts allows the table to be used even in a location where use of oil and grease should be preferably avoided and under the environment that tends to suffer from water scattering.

- Best suited for positioning mechanism of super small device!*
- Measuring equipment
  - Watch assembling machine
  - Medical equipment
  - Winder etc....
  - Electronic parts assembling machine
  - Bio-related equipment
  - Robot

✓ **This table can respond to various requests!**

We can prepare tables of various specifications such as switching table specification, lead screw specification, and stainless steel cover specification, in order to meet customer needs. For more information, please contact IKO.

*Example of special specification: Switching table specification*

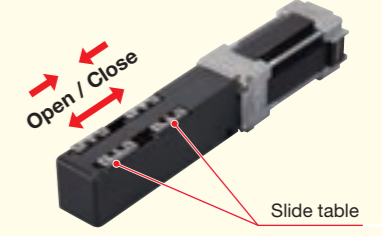


## Variation

Shape	Model and size	Stroke length (mm)					
		10	20	30	40	50	60
Standard table 	TM15	-	☆	-	☆	-	☆
Long table	TM15G	☆	-	☆	-	☆	-

1N=0.102kgf=0.2248lbs.  
1mm=0.03937inch

# Identification Number

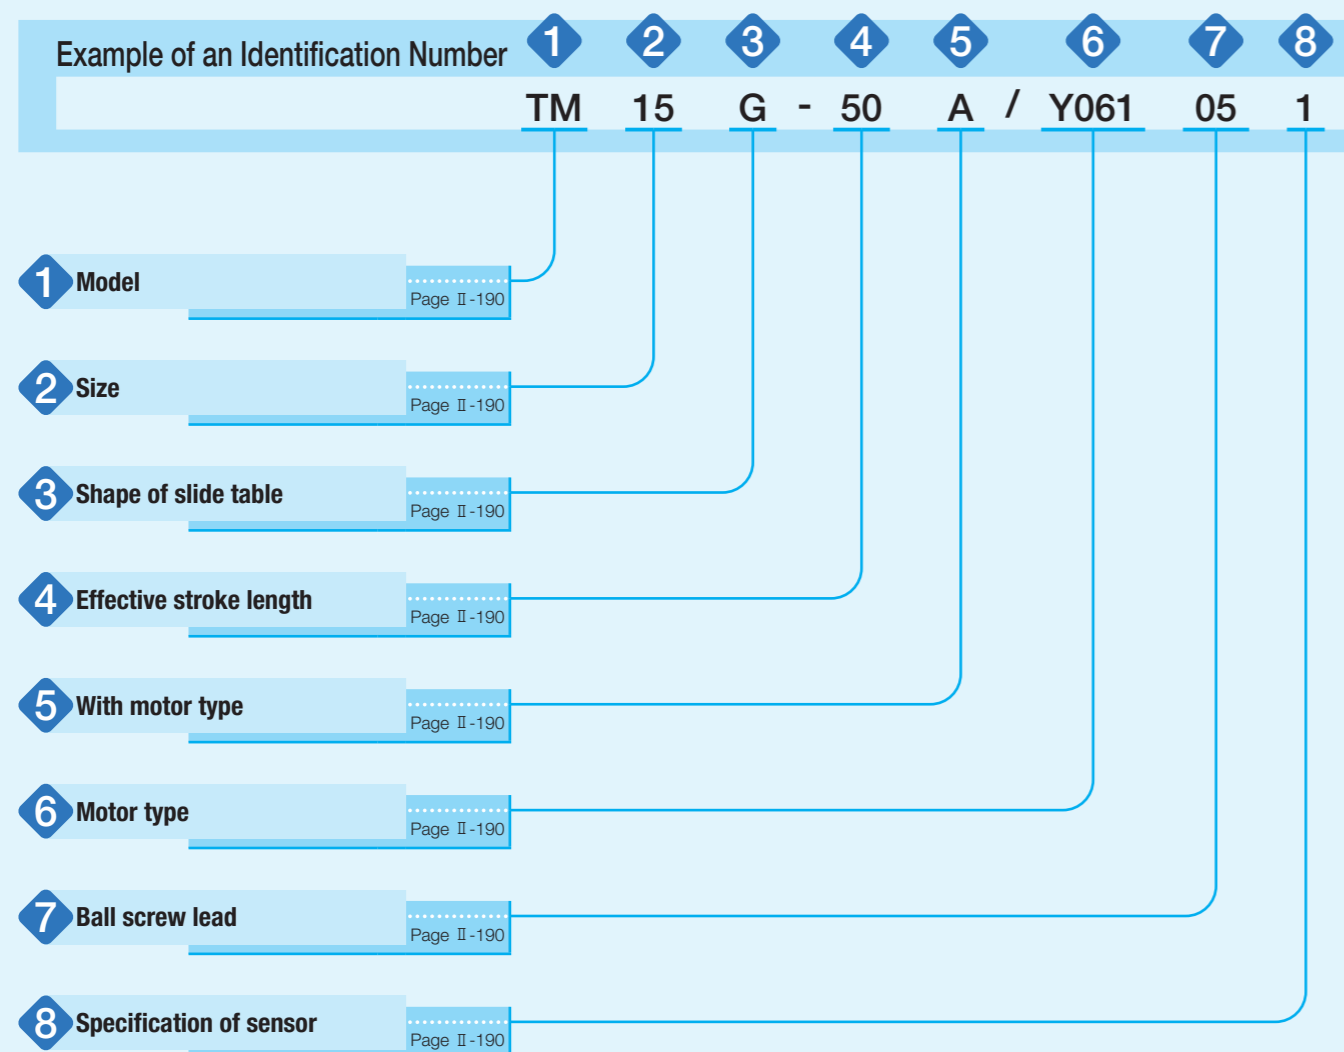

# Identification Number and Specification

- 1 Model: TM: Micro Precision Positioning Table TM
- 2 Size: 15: Table width 15mm
- 3 Shape of slide table: No symbol: Standard table G: Long table
- 4 Effective stroke length: Select a effective stroke length from the list of Table 1.

Table 1 Shape of slide table and effective stroke length

Shape of slide table	Effective stroke length mm
Standard table	20、40、60
Long table	10、30、50

- 5 With motor type: A: With motor
- 6 Motor type:
  - Y061: AC servomotor (standard type)
  - Y062: AC servomotor (high torque type)
  - T002: Stepper motor (five phases)
  - T003: Stepper motor (two phases)

When Y062 is specified, ⚡ Ball screw lead of 0.5mm cannot be specified.  
For details of motor specification, see pages II-195 and II-197.  
If you use a non-standard motor, please contact IKO.
- 7 Ball screw lead:
  - 05: Lead 0.5mm
  - 10: Lead 1.0mm
  - 15: Lead 1.5mm

When the ball screw lead of 0.5mm is specified, Y062: AC servomotor (high torque type) cannot be specified in ⚡.
- 8 Specification of sensor:
  - 0: Without sensor
  - 1: With sensor (on the right as viewed from the side opposite the motor)
  - 2: With sensor (on the left as viewed from the side opposite the motor)

Once you select "Without sensor", adding a sensor afterward is not allowed.  
Once you select "Without sensor", the motor wiring will be on the right as viewed from the side opposite the motor.  
If "With sensor" is selected, the directions of wirings for the motor and the sensor are the same direction.

Remark: A resin table cover is used but a stainless table cover can also be manufactured. If needed, please contact IKO.

# Specifications

**Table 2 Accuracy**

unit: mm

Model	Ball screw lead	Positioning repeatability	Positioning accuracy
TM15 -20	0.5	±0.001	0.015
	1	±0.002	
	1.5		
TM15 -40	0.5	±0.001	0.015
	1	±0.002	
	1.5		
TM15 -60	0.5	±0.001	0.015
	1	±0.002	
	1.5		
TM15G-10	0.5	±0.001	0.015
	1	±0.002	
	1.5		
TM15G-30	0.5	±0.001	0.015
	1	±0.002	
	1.5		
TM15G-50	0.5	±0.001	0.015
	1	±0.002	
	1.5		

**Table 3 Maximum speed**

Motor type	Number of revolutions of motor min <sup>-1</sup>	Maximum speed mm/s		
		Lead 0.5mm	Lead 1mm	Lead 1.5mm
AC servo motor	6 000	50	100	150
Stepper motor	1 800	15	30	45

Remark: To measure the practical maximum speed, it is required to consider operation patterns based on the motor to be used and load conditions.

**Table 4 Maximum carrying mass**

Model and size	Ball screw lead mm	Maximum carrying mass kg	
		Horizontal	Vertical
TM15	0.5	0.7	0.5
	1.0	0.7	0.5
	1.5	0.7	0.5
TM15G	0.5	1.5	0.5
	1.0	1.5	0.5
	1.5	1.5	0.5

**Table 5 Specifications of ball screw**

unit: mm

Model and size	Shape of slide table	Stroke	Shaft dia.	Overall length
TM15	Standard	20	2	54
		40		74
		60		94
	Long	10		54
		30		74
		50		94

**Table 6 Table inertia, coupling inertia, and starting torque**


Model and size	Table inertia $J_T$ $\times 10^{-5} \text{kg} \cdot \text{m}^2$			Coupling inertia $J_C$ $\times 10^{-5} \text{kg} \cdot \text{m}^2$	Starting torque $T_s$ N·m
	Lead 0.5mm	Lead 1mm	Lead 1.5mm		
TM15 -20	0.00013	0.00016	0.00022	0.0028	0.005
TM15 -40	0.00016	0.00019	0.00024		
TM15 -60	0.00018	0.00021	0.00026		
TM15G-10	0.00014	0.00019	0.00028		
TM15G-30	0.00016	0.00021	0.00030		
TM15G-50	0.00018	0.00023	0.00032		

# Mounting

For the processing accuracy of the Precision Positioning Table mounting surface and the tightening torque of the fixing screws, see page III-29.

# Sensor Specification

**Table 7 Sensor timing chart**

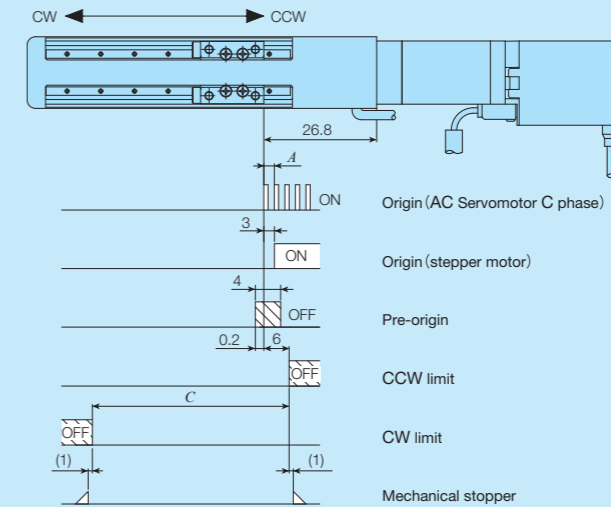


unit: mm

Model and size	Ball screw lead	A	Effective stroke length <sup>(1)</sup>	C (Ref.)
TM15 -20	0.5	0.5	20	Effective stroke length+2
	1	1		
	1.5	1.5		
TM15 -40	0.5	0.5	40	Effective stroke length+2
	1	1		
	1.5	1.5		
TM15 -60	0.5	0.5	60	Effective stroke length+2
	1	1		
	1.5	1.5		
TM15G-10	0.5	0.5	10	Effective stroke length+0.5
	1	1		
	1.5	1.5		
TM15G-30	0.5	0.5	30	Effective stroke length+0.5
	1	1		
	1.5	1.5		
TM15G-50	0.5	0.5	50	Effective stroke length+0.5
	1	1		
	1.5	1.5		

Note (1) The sensor position cannot be adjusted. The effective stroke length indicates the stroke length that can be surely secured between the limit sensors.

- Remarks 1. "With sensor" or "Without sensor", and wiring directions are specified using the corresponding identification number.  
 2. For the specifications of respective sensors, please see the section of sensor specification in General Explanation.  
 3. The origin sensor is for stepper motor.

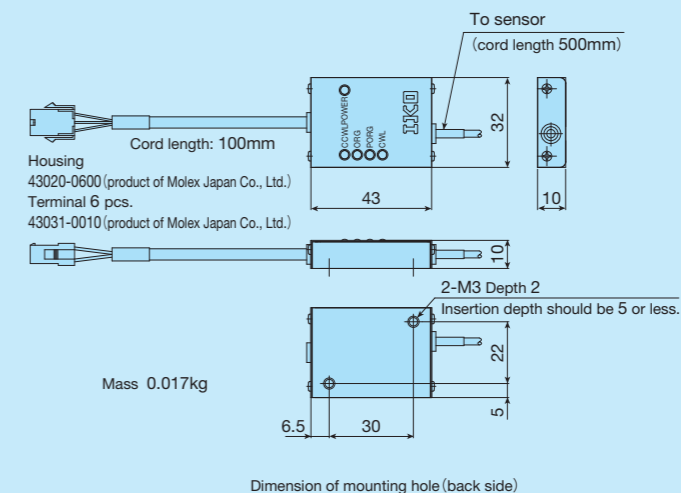


**Fig.1 Outside dimension of sensor amplifier**

# System Configuration

A dedicated driver for Micro Precision Positioning Table TM is provided. Pages II-193 and II-194 show its typical system configuration. For the specifications of the driver, please see the section of specifications of motor and driver on pages II-189 to II-192. When you place an order, please specify desired identification numbers from the list of Tables 8 and 9.

**Table 8 System Configuration for AC Servomotor (Y061, Y062)**

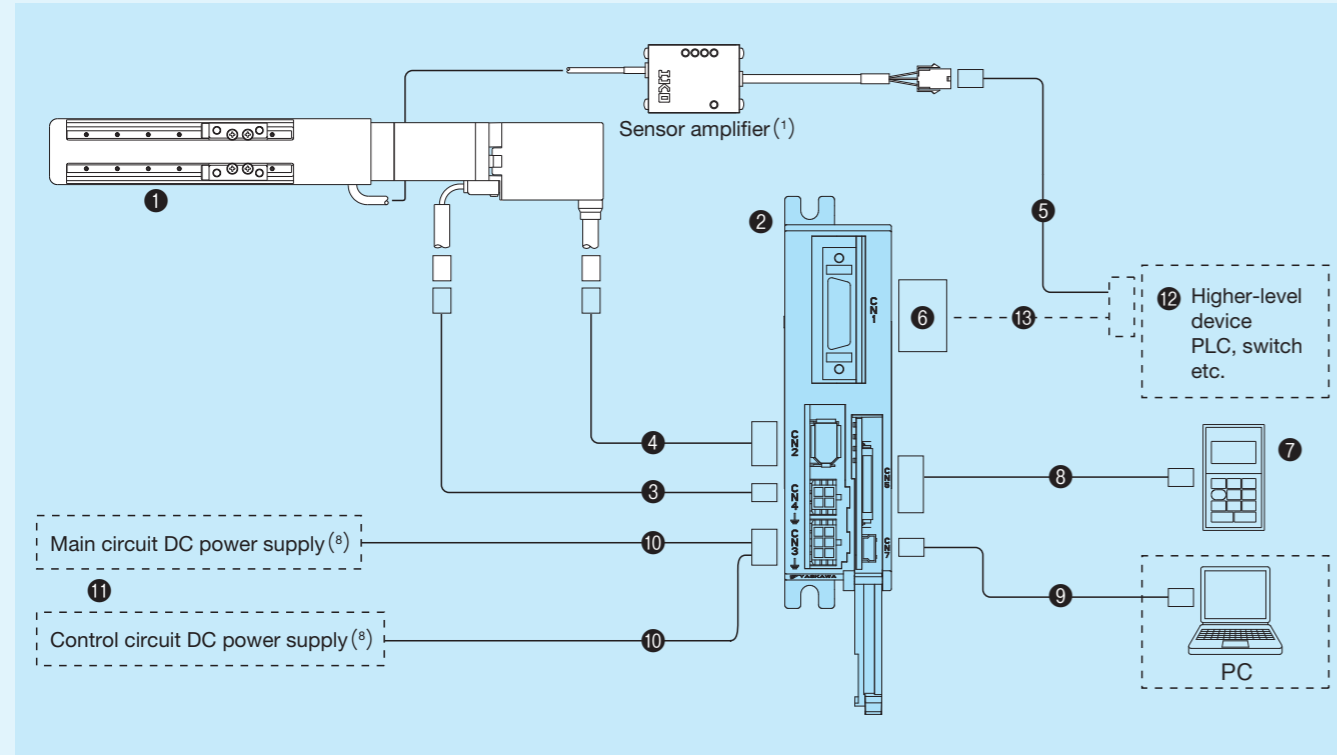


No.	Name	Identification number	
1	Table body (motor code)	Y061 AC Servomotor (standard type)	Y062 AC Servomotor (high torque type)
2	Driver <sup>(2)</sup>	SGDV-1R7EP1A	
3	Motor cord (3m) <sup>(2) (3)</sup>	JZSP-CF1M20-03-E	
4	Encoder cord (3m) <sup>(2) (3)</sup>	JZSP-CMP10-03-E	
5	Sensor extension cord (3m) <sup>(2) (3) (4)</sup>	TAE10W0-LC03	
6	I/O connector	TAE20W1-CN <sup>(5)</sup>	
7	Digital operator <sup>(2) (6)</sup>	JUSP-OP05A-1-E	
8	Digital operator extension cable <sup>(2) (6)</sup>	JZSP-CF1S00-A3-E	
9	PC connection cable <sup>(2) (6)</sup>	JZSP-CVS06-02-E	
10	Power supply cable <sup>(2) (4) (7)</sup>	JZSP-CF1G00-□□-E	
11	Power supply <sup>(8)</sup>	This must be prepared by customer.	
12	Higher-level device		
13	I/O connector connection cable		

- Notes (1) Once you select "Without sensor", a sensor amplifier will not be attached.  
 (2) Manufactured by Yaskawa Electric Corporation.  
 (3) For specific cord length, please contact IKO.  
 (4) The higher-level device side of the cord will be loose.  
 (5) I/O connector TAE20W1-CN is a combined product of 10126-3000PE (connector) and 10326-52F0-008 (cover) from 3M Japan Limited.  
 (6) A digital operator or ordinary PC is required for parameter setting.  
 (7) Specify the length 1 - 3m in 1m increments in □□ of the identification number. (Example for 3m: JZSP-CF1G00-03-E)  
 (8) The main circuit power supply supports DC48V as well as DC24V. The control circuit power supply is DC24V. Each power supply must be prepared separately by the customer.

- Remarks 1: The motor cord, encoder cord and sensor extension cord have excellent bending resistance.  
 2: Initial setting of parameters is required for the driver for AC Servomotor.  
 When setting parameters with an ordinary PC, download the setting software from the Yaskawa Electric Corporation website.  
 (URL: <http://www.e-mechatronics.com/download/tool/servo/sgmwinpls/download.html>)

**Table 9 System Configuration for stepper motor (T002, T003)**

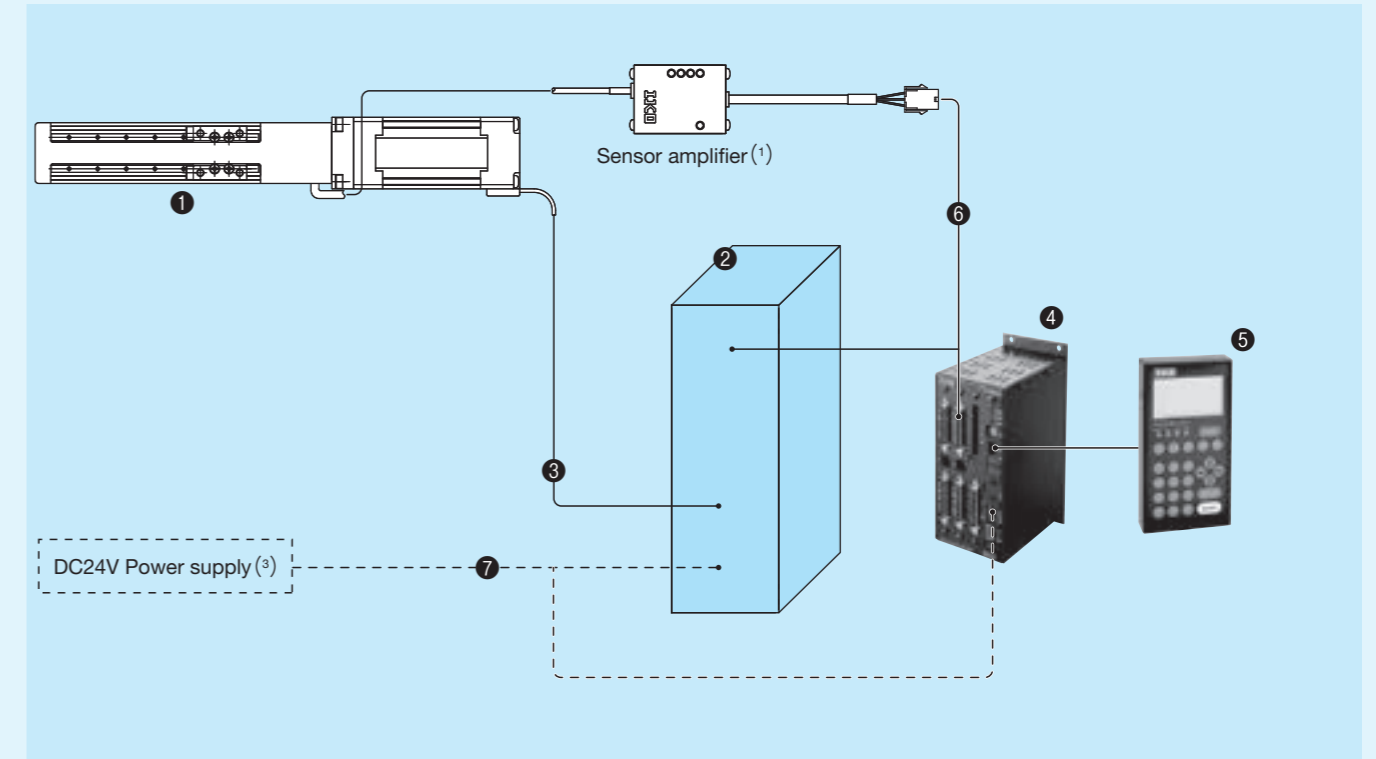

No.	Name	Identification number	
1	Table body (motor code)	T002 Stepper motor (five phases)	T003 Stepper motor (two phases)
2	Driver <sup>(2)</sup>	TD-5M13-L	eTD-24A
3	Motor cord	TAE20S6-SM0□ (Fixed cable specification)	TAE20S8-SM0□ (Fixed cable specification)
		TAE20S7-SN0□ (Bending-resistant cable specification)	TAE20S9-SN0□ (Bending-resistant cable specification)
4	Programmable controller	CTN481G	
5	Teaching box	TAE10M5-TB	
6	Pulse / Limit cord <sup>(4)</sup>	TAE10U7-LD0□ (Fixed cable specification)	TAE10U9-LD0□ (Fixed cable specification)
		TAE10U8-LD0□ (Bending-resistant cable specification)	TAE10V0-LD0□ (Bending-resistant cable specification)
7	Power cord	This must be prepared by customer. <sup>(5)</sup>	

- Notes (1) Once you select "Without sensor", a sensor amplifier will not be attached.  
 (2) Made by Tohan-Denshi Kiki Co., Ltd.  
 (3) DC24V power supply must be prepared separately by the customer.  
 (4) If the customer uses any other programmable controller than CTN481G, the pulse / limit cord must be prepared by customer.  
 (5) Connectors are provided for the driver. Please see the section of specifications of motor and driver on page II-197.  
 (6) Connect the power cord directly.
- Remarks 1: While the pulse / limit cord includes pulse cord and limit cord sections, the pulse cord section will be a fixed cable regardless of the cable specifications.  
 2: The length of pulse cord portion of pulse / limit cord is 1.5 m.  
 3: The lengths of motor cord and the limit cord portion of pulse / limit cord can be specified using the box (□) at the end of the identification number, up to 3m in increments of 1m.  
 (For 3m: TAE20S6-SM03)

# Specifications of motor and driver

## AC Servomotor manufactured by Yaskawa Electric Corporation (Y061, Y062)

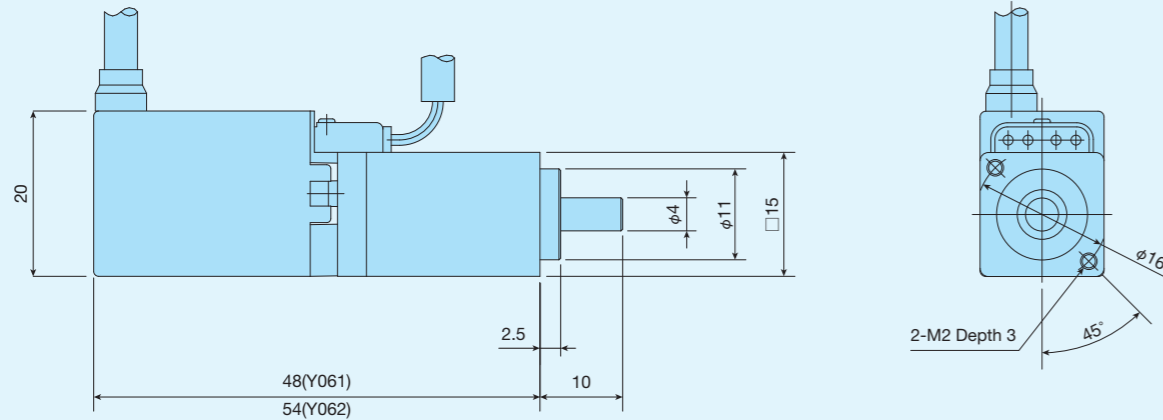


Table 10 Motor specifications

Motor type	Motor code	Motor identification number	Voltage specification	Rated output W	Rated torque N·m	Max. momentary torque N·m	Rated number of revolutions r/min	Motor inertia $J_M \times 10^{-4} \text{ kg} \cdot \text{m}^2$	Encoder resolution pulse/rev	Mass kg
Standard	Y061	SGMMV-B3E2A21	DC24V DC48V	3.3	0.0105	0.0263	3 000	0.000441	131072 (17bit)	0.055
High torque	Y062	SGMMV-B5E2A21	DC24V DC48V	5.5	0.0175	0.0438	3 000	0.000796	131072 (17bit)	0.06

Remarks 1. The main circuit power supply supports DC48V as well as DC24V.  
2. Motor torque starts to decrease when the number of revolutions of the motor exceeds 3,000 min<sup>-1</sup>.


Table 11 Specifications of wirings for the motor and connector

Motor code Y061,Y062			Motor side	Mating side
Pin No.	Content	Wire color		
1	U phase	Red	Connector 43020-0401 Contact 43031-0001 Molex Japan Co., Ltd.	Connector 43025-0400 Contact 43030-0001 Molex Japan Co., Ltd.
2	V phase	White		
3	W phase	Blue		
4	FG	Green		

Table 12 Specifications of wirings for the encoder and connector

Motor code Y061,Y062			Motor side	Mating side
Pin No.	Content	Wire color		
1	PG 5V	Orange	Socket connector solder type 54280-0609 Molex Japan Co., Ltd.	Connector crimp type 55100-0670 Molex Japan Co., Ltd.
2	PG 0V	Light green		
3	BAT(+)	Red/pink		
4	BAT(-)	Black/pink		
5	PS	Red/sky blue		
6	/PS	Black/sky blue		
Shell	FG	FG		

Table 13 Driver for AC Servomotor Y061/Y062, manufactured by Yaskawa Electric Corporation

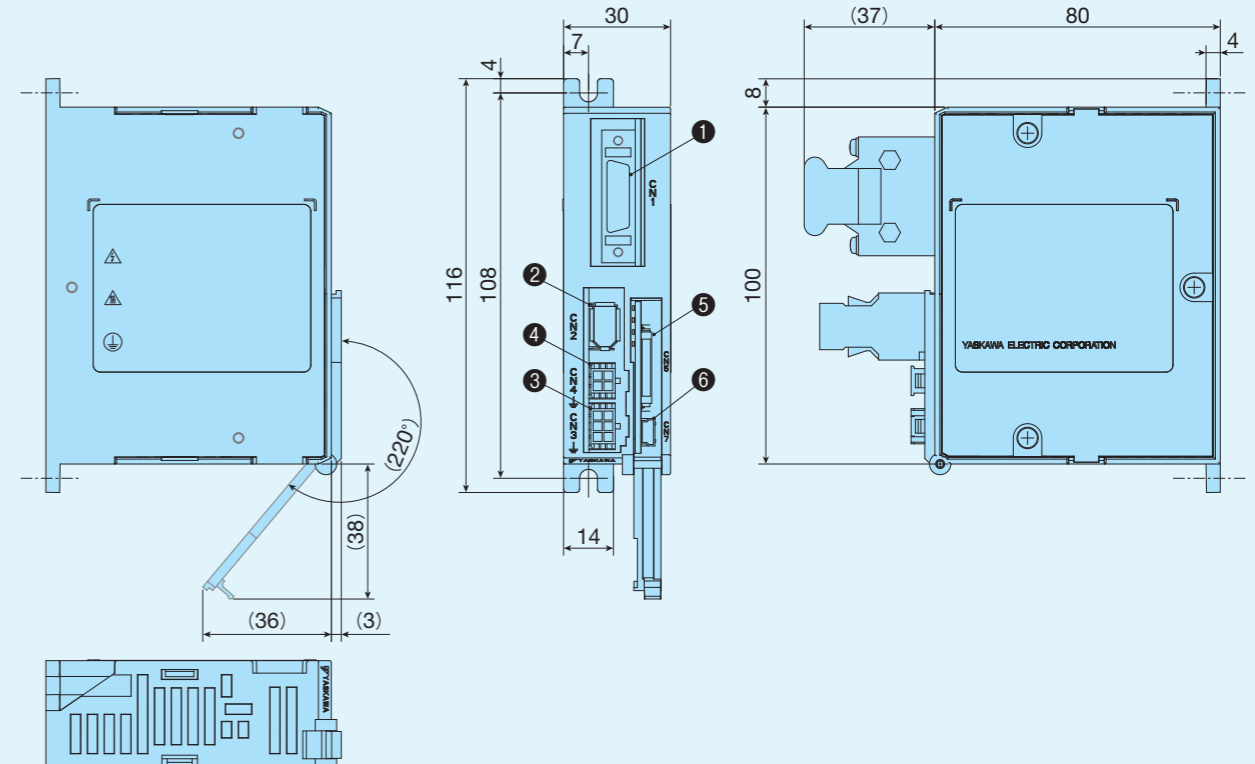

No.	Name	Function
①	CN1 I/O connector	Connect a pulse cord to this connector.
②	CN2 Encoder connector	Connect the encoder cord.
③	CN3 Driving power supply connector	Connect to the driving power supply.
④	CN4 Motor connector	Connect a motor cord to this connector.
⑤	CN5 Connector for digital operator	Connect the digital operator extension cable.
⑥	CN7 Connector for PC	Connect the PC connection cable.

Table 14 Driver specification

Identification number of driver	SGDV-1R7EP1A <sup>(1)</sup>	
Applicable motor code	Y061	Y062
Rated output of applicable motor	3.3W	5.5W
Feedback	Serial encoder 17bit	
Specified system of pulse input <sup>(1)</sup>	CW/CCW signal, pulse signal/rotational direction signal	
Specified method of pulse input <sup>(1)</sup>	Line driver, open collector	
Main circuit power supply voltage <sup>(2)</sup>	DC24V±15%, DC48V±15%	
Control circuit power supply	DC24V±15%	
Continuous output current Arms	1.7	
Maximum output current Arms	4.1	
Operating temperature range	0~55°C	
Storage temperature range	-20~85°C	
Operating humidity	90% RH or lower (keep freeze/condensation free)	
Mass kg	0.3	

Note (1) This driver is a pulse train command type. If the network communication command type or analog voltage command type is required, please contact IKO.

(2) The main circuit power supply supports DC48V and DC24V.

Stepper motor from Tamagawa Seiki Co., Ltd. (T002, T003)

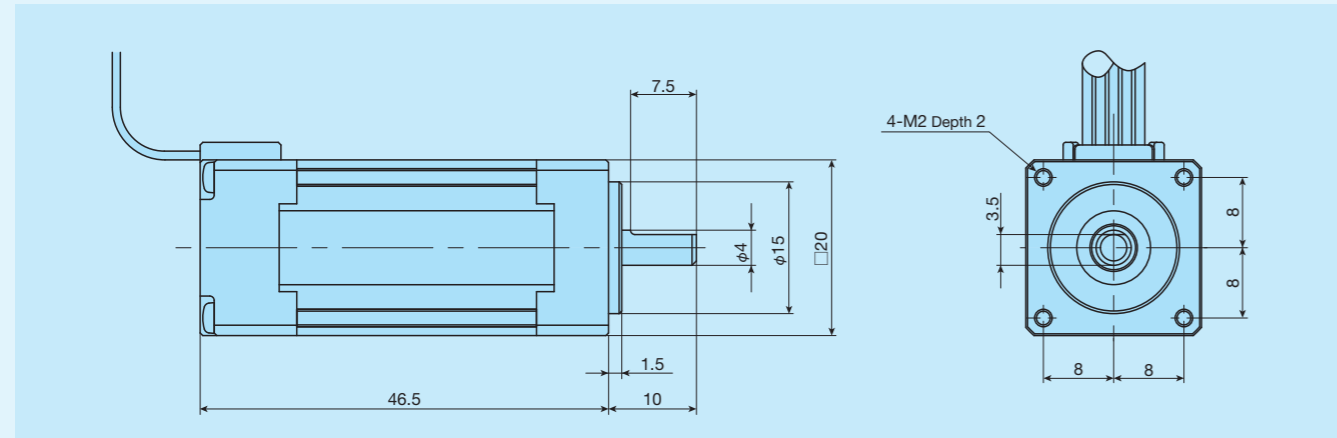


Table 15 Motor specifications


Motor code	Model number of motor	Step angle	Maximum holding torque N · m	Current A/phase	Rotor inertia $J_M \times 10^{-4} \text{kg} \cdot \text{m}^2$	Mass (Ref.) kg
T002	TS3682N2	0.72	0.024	0.35	0.004	0.085
T003	TS3692N2	1.80	0.024	0.35	0.004	0.085

Table 16 Specifications of wirings for the motor and connector

Pin No.	Color of lead wire		Motor side	Mating side <sup>(1)</sup>
	Motor code T002	Motor code T003		
1	Blue	Black	Housing 43025-0600	Housing 43020-0600
2	Red	Not use		
3	Orange	Blue	Terminal 43030-0007	Terminal 43031-0007
4	Green	Red		
5	Black	Orange		
6	Not use	Green		

Note <sup>(1)</sup> Mating-side connector must be prepared by customer.  
Remark: Connectors are manufactured by Molex Japan Co., Ltd.

Table 17 Driver for stepper motor T002 from Tohan Denshi Kiki Co., Ltd. (RoHS compliant)

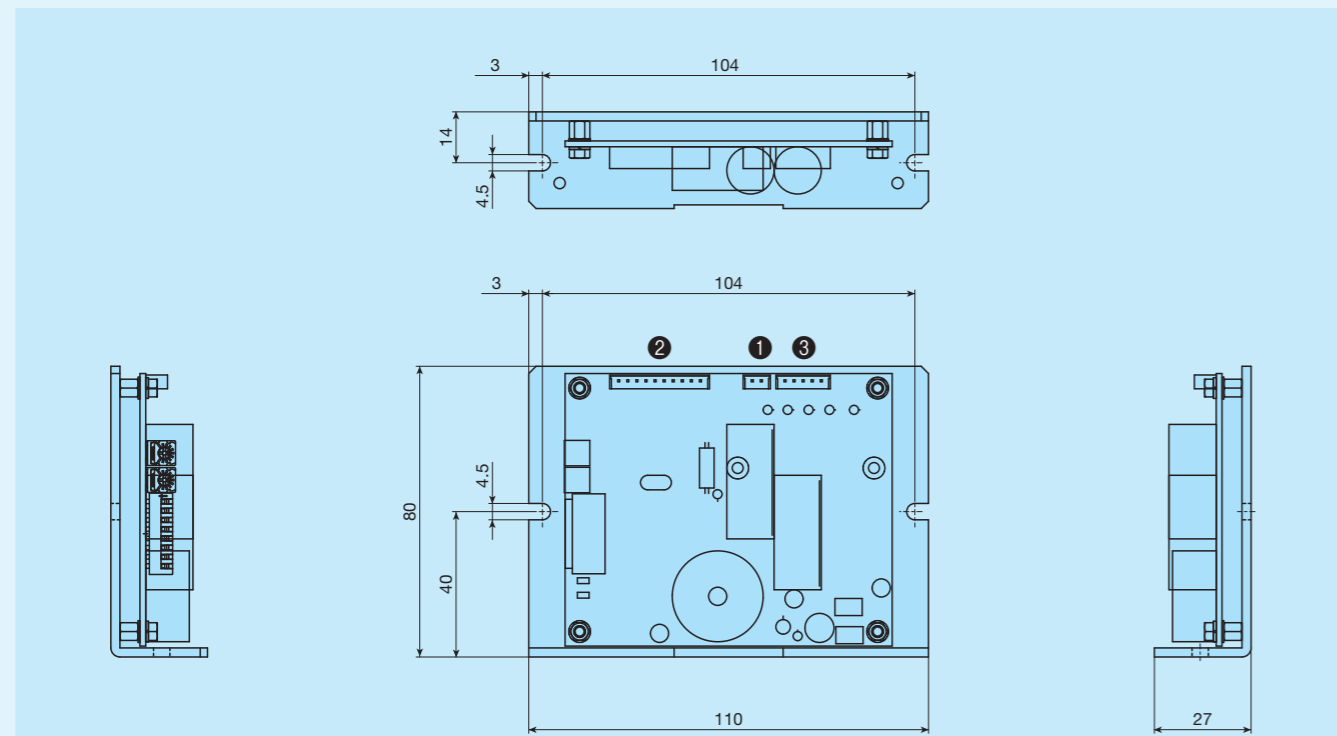

No.	Name	Function
①	CN1 Power supply connector	Connect a power supply to this connector.
②	CN2 I/O connector	Connect a pulse cord to this connector.
③	CN3 Motor connector	Connect a motor cord to this connector.

Table 18 Specifications of driver for stepper motor T002


Model number of driver	TD-5M13-L
Applicable motor code	T002
Excitation type	Micro step Max. 500 divisions
Input method	Photo coupler Input resistance 220Ω
Input format	CW/CCW signal Pulse signal/rotational direction signal
Power input	DC15 to 35V 2.5A
Ambient temperature (in operation)	0~40°C (keep freeze free)
Ambient humidity (in operation)	85% or lower (keep dewdrop free)
Mass kg	0.17

Remark: DC24V is recommended for power input. The power supply must be prepared by customer.

Table 19 Accessories of drivers for stepper motor T002

Name	Model number		Remark
	Housing	Contact	
CN1 Power supply connector	EHR-2	BEH-001T-P0.6	JST Mfg. Co., Ltd.
CN2 Control signal connectors	EHR-10		
CN3 Driving power supply connector	EHR-5		

Table 20 Driver for Stepper motor T003 from Tohan Denshi Kiki Co.,Ltd. (RoHS compliant)

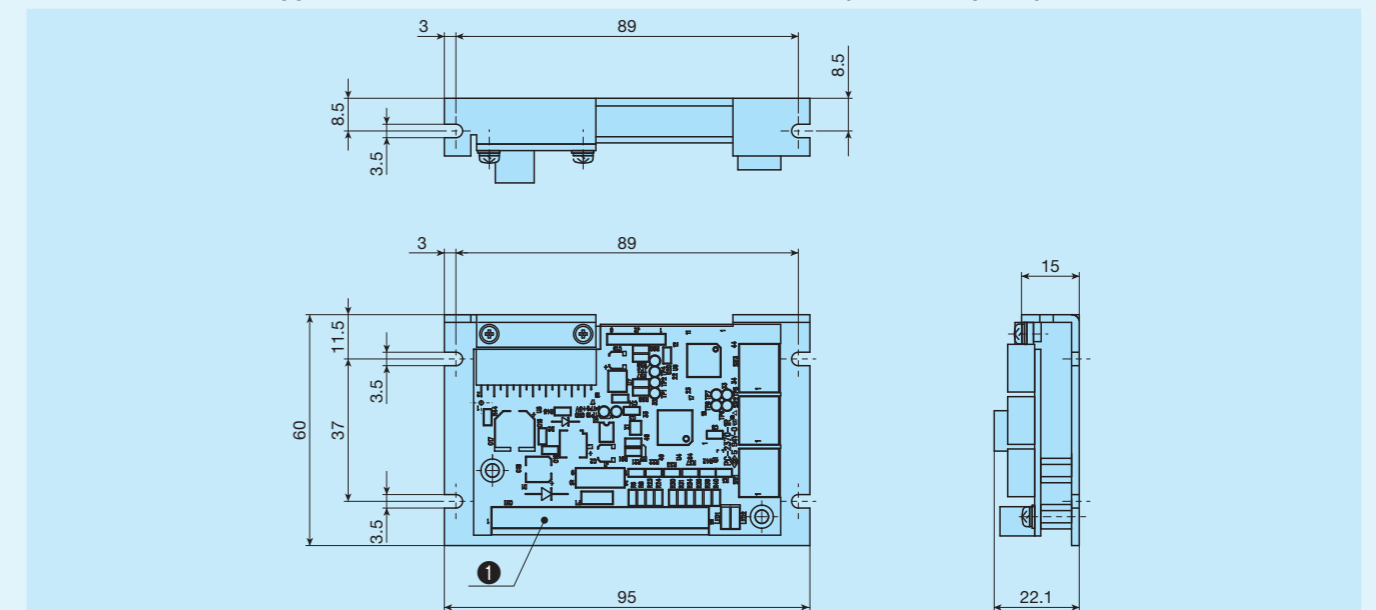


No.	Name	Function
①	I/F connector	Connect power, pulse, and motor cords to this connector.

Table 21 Specification of driver for stepper motor T003

Model number of driver	eTD-24A
Applicable motor code	T003
Excitation type	Micro step Max. 500 divisions
Input method	Photo coupler Input resistance 220Ω
Input format	CW/CCW signal Pulse signal/rotational direction signal
Power input	DC24V±10% 3A
Ambient temperature (in operation)	0~45°C (keep freeze free)
Ambient humidity (in operation)	85% or lower (keep dewdrop free)
Mass kg	0.06


Remark: DC24V power supply must be prepared by customer.

Torque chart for stepper motor T002

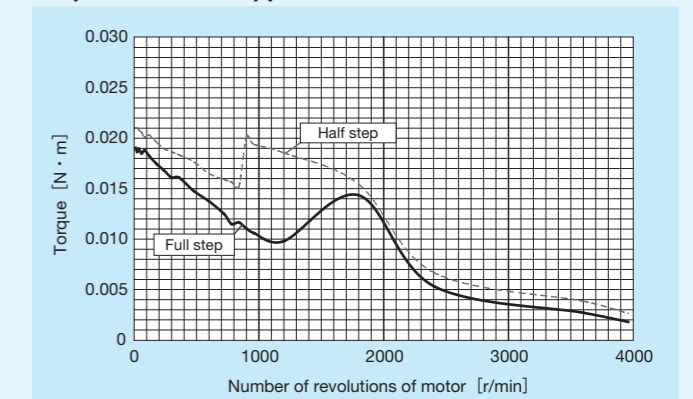

Motor code	Model number of motor	Model number of driver
T002	TS3682N2	TD-5M13-L

Torque chart for stepper motor T003

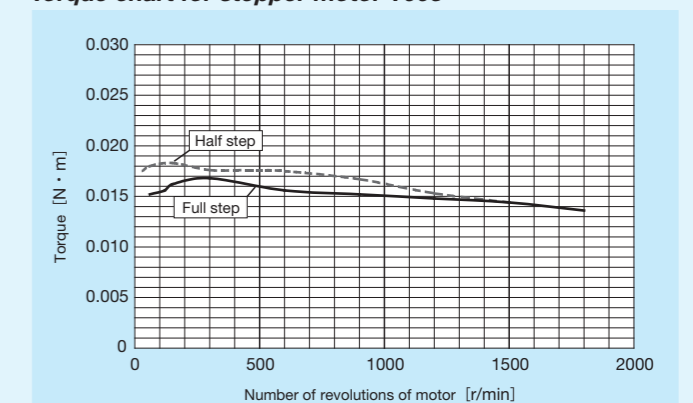


Motor code	Model number of motor	Model number of driver
T003	TS3692N2	eTD-24A

1N=0.102kgf=0.2248lbs.  
1mm=0.03937inch

# IKO Micro Precision Positioning Table TM

## TM15 Specifications of AC servomotor

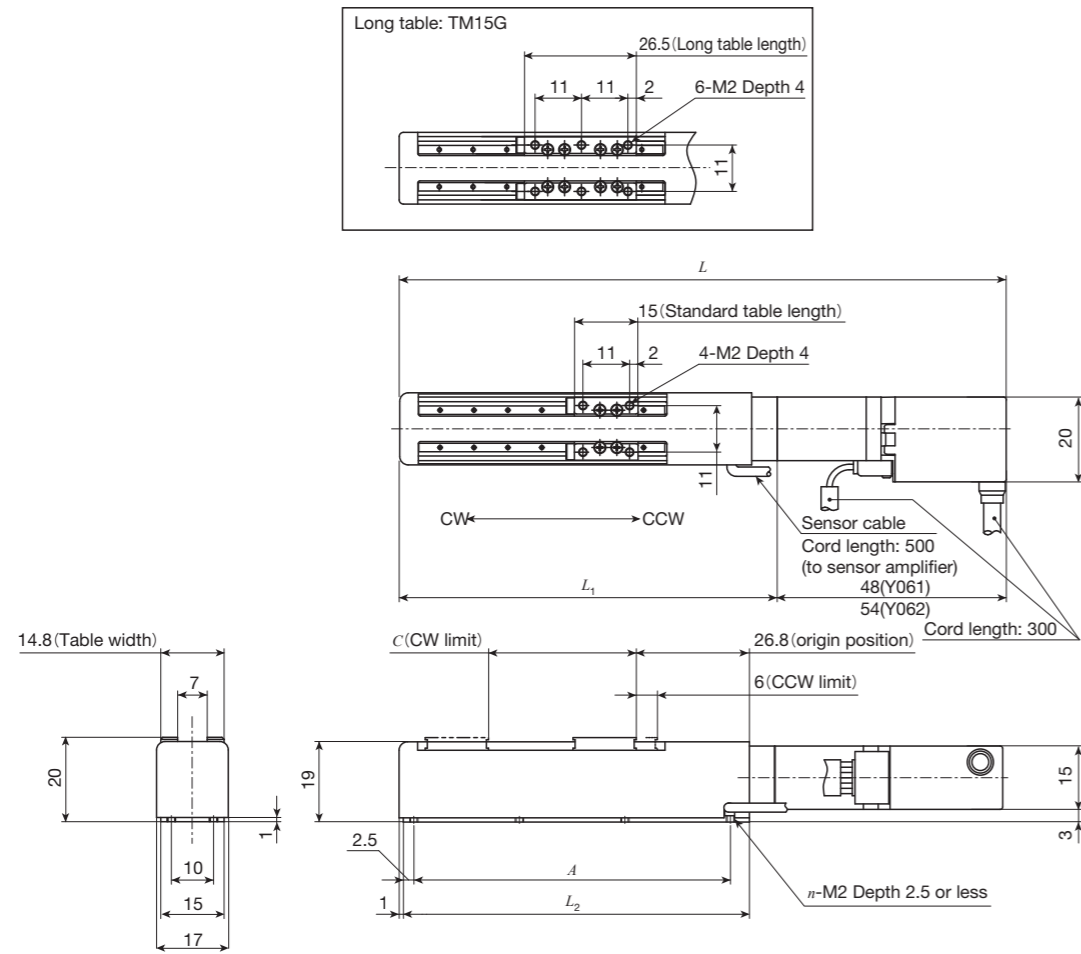

Unit: mm


Model and size	Stroke length		Dimensions of table						Mass <sup>(1)</sup> (Ref.) kg
	Effective stroke length <sup>(2)</sup>	CW limit position C	Overall length L		L <sub>1</sub>	L <sub>2</sub>	Mounting holes of bed A (Number of units x pitch)		
			Y061	Y062			A	n	
TM15 -20	20	16	117	123	69	62	50 (2×25)	6	0.15
TM15 -40	40	36	137	143	89	82	75 (3×25)	8	0.16
TM15 -60	60	56	157	163	109	102	96 (4×24)	10	0.17
TM15G-10	10	4.5	117	123	69	62	50 (2×25)	6	0.16
TM15G-30	30	24.5	137	143	89	82	75 (3×25)	8	0.17
TM15G-50	50	44.5	157	163	109	102	96 (4×24)	10	0.18

Note <sup>(1)</sup> Represents value when Y061 is specified. It will be 0.01 kg heavier when Y062 is specified.

<sup>(2)</sup> The sensor position cannot be adjusted. The effective stroke length indicates the stroke length that can be surely secured between the limit sensors.

Remark: A resin table cover is used but a stainless steel table cover can also be manufactured. If needed, please contact IKO.

## TM15 Specifications of stepper motor

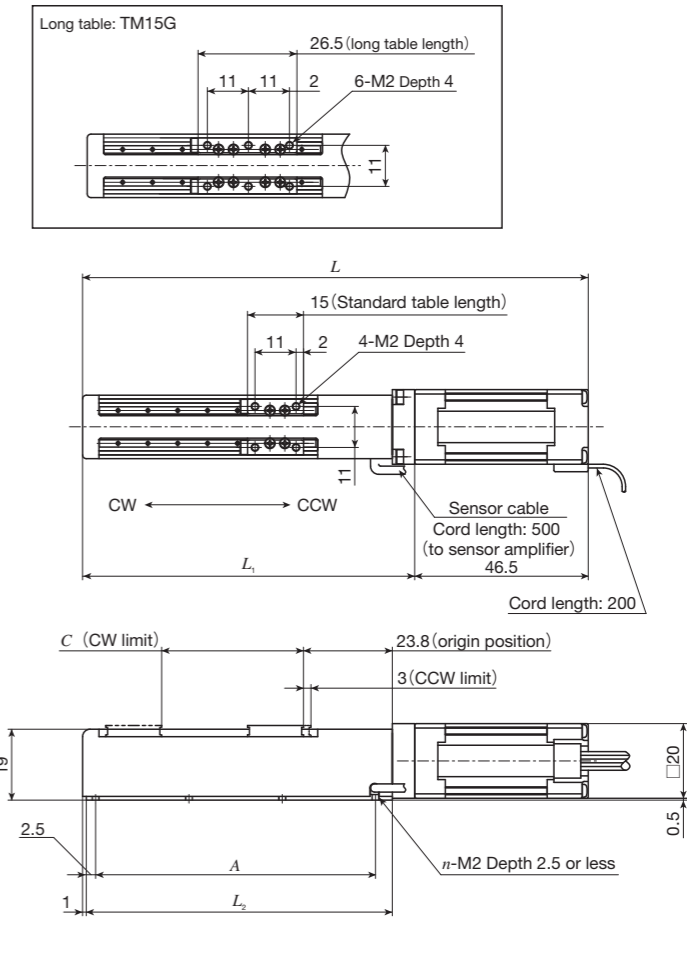

unit: mm

Model and size	Stroke length		Dimensions of table						Mass (Ref.) kg
	Effective stroke length <sup>(1)</sup>	CW limit position C	Overall length L		L <sub>1</sub>	L <sub>2</sub>	Mounting holes of bed A (the number of holes×pitch)		
			A	n					
TM15 -20	20	19	115.5	69	62	50 (2×25)	6	0.18	
TM15 -40	40	39	135.5	89	82	75 (3×25)	8	0.19	
TM15 -60	60	59	155.5	109	102	96 (4×24)	10	0.20	
TM15G-10	10	7.5	115.5	69	62	50 (2×25)	6	0.19	
TM15G-30	30	27.5	135.5	89	82	75 (3×25)	8	0.20	
TM15G-50	50	47.5	155.5	109	102	96 (4×24)	10	0.21	

Note <sup>(1)</sup> The sensor position cannot be adjusted. The effective stroke length indicates the stroke length that can be surely secured between the limit sensors.

Remark: A resin table cover is used but a stainless table cover can also be manufactured. If needed, please contact IKO.